

Description:

PMI Model Number: PE2-30-1R018R0-4R5-22-12-SFF-1 is a 1 to 18 GHz low noise amplifier. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component.

Specifications:

Frequency Range:	1 to 18 GHz
Gain:	30dB Typ
Gain Flatness:	±1.5dB Max
Noise Figure:	4.5dB Max
OP1dB:	22dBm Min
VSWR Input/Output:	2.0:1 Max
DC Supply:	+12 to +15VDC @ 500mA Typ
Connectors In/Out:	SMA Female
Finish:	Gold Plated

Features:

Internal Voltage Regulation
Unconditional Stability

Available Options:

Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available
Hermetic Sealing

Environmental Ratings:


Temperature:	-54°C to + 95°C (Operating) -65°C to +125°C (Storage)
Humidity:	MIL-STD-202F, METHOD 103B COND B.
Shock:	MIL-STD-202F, METHOD 213B COND B.
Altitude:	MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle:	MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.


ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	09/05/13	
	A1	ECN # 14-0184	11/18/14	
	A2	ECN # 17-0075	04/24/17	

PE2 HOUSING WITH CARRIER

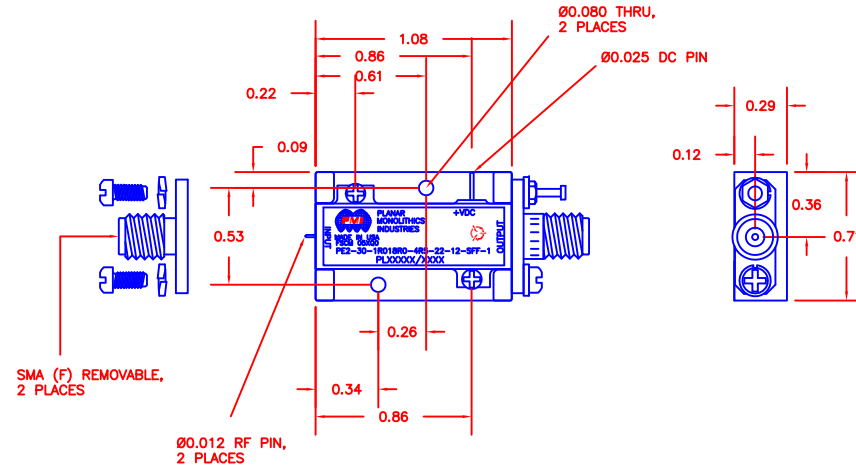

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

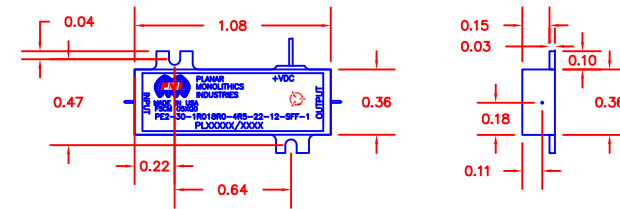

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>afk</i>		09/05/13	PRODUCT FEATURE		
CHECKED			PE2-30-1R018R0-4R5-22-12-SFF-1		
ISSUED			SIZE	FSCM NO.	DWG NO.
			A	05XQ0	27021121
			SCALE	N:S	SHEET 1 OF 1
			REV.	A2	