



**SUMMARY TEST DATA
ON
FILTER**

Customer :
 SO No : SO11-134-F
 Model No : 12CL11D8G-1400-CD-SFF
 Serial No : PL9444/1134 – PL9452/1134

Tested By : S. PALACIO
 Temperature : +25°C
 Date : 8/25/2011

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency	11800 MHz Nom.	See plots	
2	3 dB Pass band Bandwidth:	1400 MHz Min.	See plots	
3	Passband Insertion Loss:	5 dB Max	See plots	
4	Loss Ripple (peak to peak)	0.5 dB Max	See plots	
5	Rejection	60 dB DC – 10140 MHz Min.	See plots	
6	Rejection	30 dB 13740 MHz – 17000 MHz	See plots	
7	Rejection	50 dB @ 13020 MHz	See plots	
8	Pass band VSWR	1.5:1 Max	See plots	
9	Input Power	+30 dBm	Pass	
10	Impedance (Source Load)	50 ohms Nom.	Pass	


Production Manager Approval: _____ Date: _____

QA/QC Approval: _____ Date: _____

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-F GROVE ROAD FREDERICK, MD 21704
 TEL: 301-682-5019 FAX: 301-662-1731
 www.planarmonolithicsindustries.com/pmi



Typical Performance

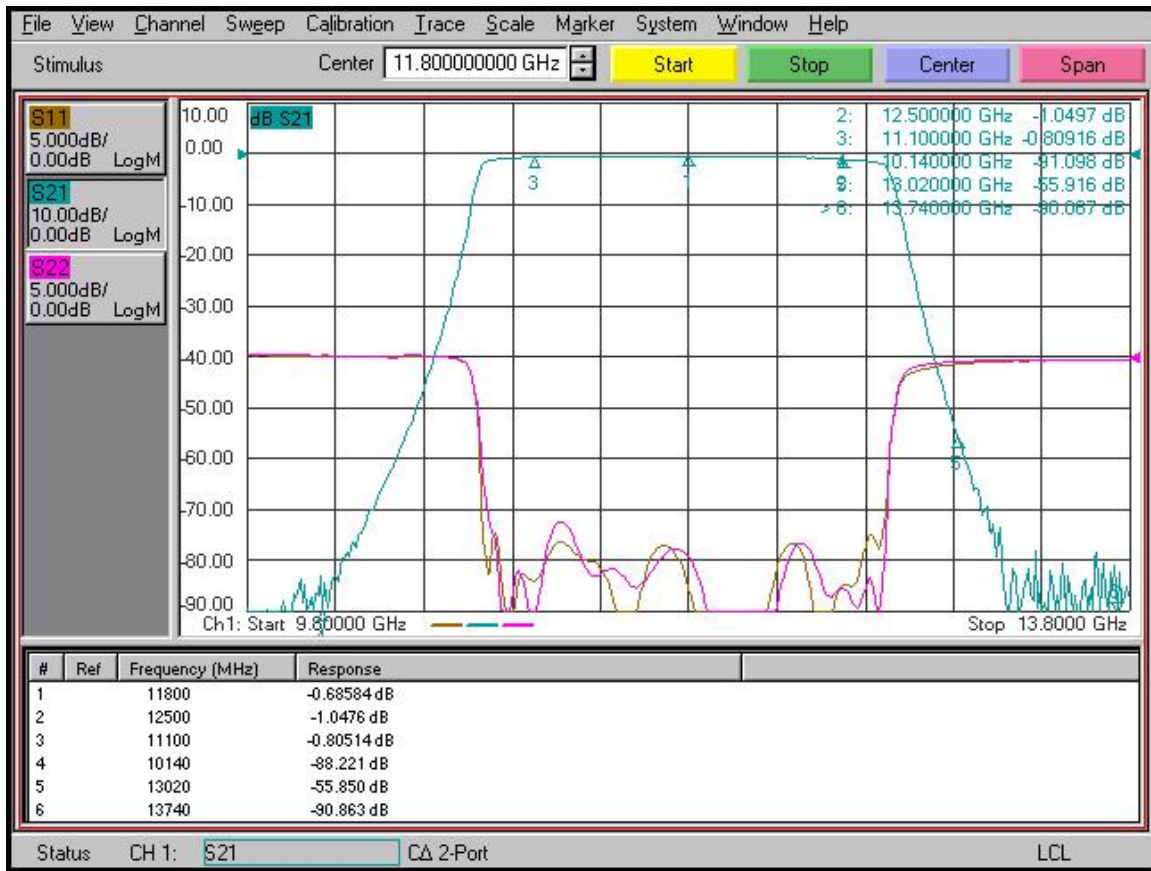

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MD 21704

TEL: 301-682-5019 FAX: 301-662-1731

www.planarmonolithicsindustries.com/pmi